




SRM1801 Fuse Blown?

Question: We have a Mackie SRM 1801 powered sub. We're getting no power. Manual says in the troubleshoot section it may have fuse that is blown.

Answer: Here is the information I found on the fuse in the SRM1801.

To remove and replace the fuse:

1. Disconnect the power cord from the IEC socket.
2. Remove the fuse drawer using a small screwdriver.
It will slide all the way out.

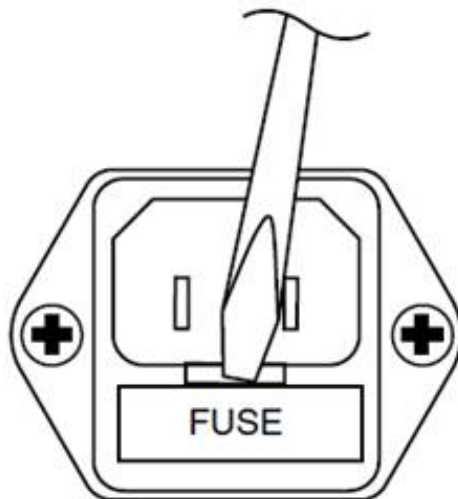

3. Remove the fuse and replace it with an equivalent-type fuse.

115 VAC unit: 6.3 amp slo-blo (T 6.3 A H 250 V)

230 VAC unit: 3.15 amp slo-blo (T 3.15 A H 250 V)